



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

51 International Patent Classification:

C01B 3/38

A1

52 International Publication Number:

WO 00/05168

53 International Publication Date:

2 February 2000

21 International Application Number:

PCT/EP98/04573

22 International Filing Date:

22 July 1998

71 Applicant: *for all designated states except DK*: HALDOR  
TOPSØE A/S [DK DK], Sønderhoj 85, DK-2600 Lyngby  
(DK).

72 Inventors: and


73 Inventor/Applicants: *for DK*: Jørgen LØYBKJÆR, Jr.  
[DK DK], Nørre Brøndbyvej 25, Bldg. 7B-2150, Copen-  
hagen Ø, [DK]; STEEN CHRISTENSEN, Peter [DK DK],  
Glasse, 7, Adv. 104-24\*, Copenhagen NV [DK DK];  
CASSEN HANSEN, Viggo [DK DK], Rensbovej 12  
DK-2700 Brøndby, [DK]; RØSTVED-NIELSEN, L. E.  
[DK DK], Rensbovej 27, DK-2650 Virum [DK].74 Agent: GRUNCKER, KINKELMEY, STOCKMAIR &  
SCHWANHAÜSSER, Maximilianstrasse 58, D-80538  
München [DE].

Published

With international search report

Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, FR, GB, GR,  
HU, IL, IN, JP, KE, KG, KP, KR, KZ, LA, LK, LR, LS,  
LT, LU, LV, MD, MG, MK, MN, MW, MX, NC, NZ, PL, PT,  
RO, RU, SD, SE, SG, SI, SK, SL, TH, TM, TR, TT, UA,  
UG, US, UZ, VN, YU, TW, AR, IP, patent: GH, GM, KE,  
LS, MW, SD, SL, UG, ZW, human patent: AM, AZ, BY,  
KG, KZ, MD, RU, TT, TM, human patent: AT, BE, CH, CY,  
DE, DK, ES, FI, FR, GB, GR, HU, IT, LU, MC, NL, PT,  
SE, OAP, patent: BL, BR, CH, CG, CL, CM, GA, GN, GW,  
ML, MR, NE, NG, TN, TG.

54 Title: SYNTHESIS GAS PRODUCTION BY STEAM REFORMING

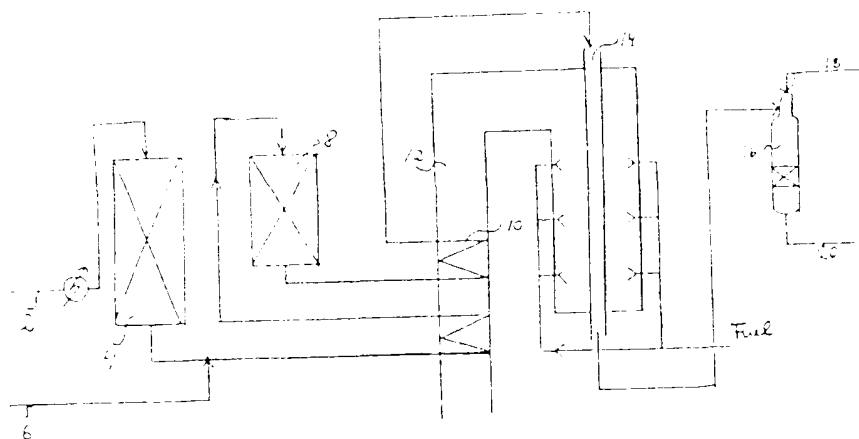

## 57 Abstract

Process for the preparation of hydrogen and carbon monoxide rich gas by steam reforming of hydrocarbon feedstock in presence of a steam reforming catalyst supported as thin film on the wall of a reactor, comprising steps of (a) optionally passing a process gas of hydrocarbon feedstock through a first reactor with a thin film of steam reforming catalyst supported on walls of the reactor in heat conducting relationship with a hot gas stream, (b) raising effluent from the first reactor to a subsequent tubular reactor being provided with a thin film of steam reforming catalyst and/or steam reforming catalyst pellets and being heated by burning of fuel, thereby obtaining a partially steam reformed gas effluent and a hot gas stream of fuel gas, (c) passing the effluent from the second reactor to an autothermal reformer, and (d) withdrawing from the autothermal reformer a hot gas stream of product gas rich in hydrogen and carbon monoxide.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VS	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Cote d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SG	Singapore		
DK	Denmark	LR	Latvia				
EE	Estonia						




### Synthesis Gas Production by Steam Reforming

The present invention is directed to the production of synthesis gas by steam reforming of a hydrocarbon feedstock in contact with catalyzed hardware.

The term catalyzed hardware is used for a catalyst system, where a layer of catalyst is fixed on a surface of another material, e.g. metallic surfaces. The other material serves as the supporting structure giving strength to the system. This allows to design catalyst shapes which would not have sufficient mechanical strength in itself. The system herein consists of tubes on which a thin layer of reforming catalyst is placed on the inner wall.

Alternative layouts may comprise of tubes with a catalyst layer on the outside, plates with catalyst coating, or other suitable shapes.

Synthesis gas is produced from hydrocarbons by steam reforming by the reactions (1)-(3):



A second method for production of synthesis gas is autothermal reforming (ATR). In autothermal reforming, combustion of hydrocarbon feed is carried out with substoichiometric amounts of oxygen by flame reactions in a burner combustion zone and, subsequently, steam reforming of the partially combusted feedstock in a fixed bed of steam reforming catalyst. The oxidant can be air, enriched air, or pure oxygen.

A third method for production of synthesis gas is the combination of first passing the hydrocarbon feed through a fixed bed of reforming catalyst and, subsequently, passing the partly reformed feed through an

autothermal reformer. The fixed bed may comprise of a number of tubes placed in a fired furnace. This combination is called two-step reforming or primary followed by secondary reforming and is particularly suited for production of synthesis gas for methanol and ammonia production. By controlling the amount of reforming occurring in the fixed bed steam reformer before the ATR, a synthesis gas having the correct stoichiometry for methanol synthesis or a synthesis gas having the correct ratio of hydrogen to nitrogen for ammonia synthesis can be produced.

State of the art steam reforming technology makes use of reforming catalyst in the form of pellets of various sizes and shapes. The catalyst pellets are placed in fixed bed reactors (reformer tubes). The reforming reaction is endothermic. In conventional reformers, the necessary heat for the reaction is supplied from the environment outside the tubes usually by a combination of radiation and convection to the outer side of the reformer tube. The heat is transferred to the inner side of the tube by heat conduction through the tube wall and is transferred to the gas phase by convection. Finally, the heat is transferred from the gas phase to the catalyst pellet by convection. The catalyst temperature can be more than 100°C lower than the inner tube wall temperature at the same axial position of the reformer tube.

It has been found that heat transport is more efficient when catalyzed hardware is used in the steam reforming process. The heat transport to the catalyst occurs by conduction from the inner tube wall. This is a much more efficient transport mechanism than the transport by convection via the gas phase. The result is that the temperatures of the inner tube wall and the catalyst are almost identical (the difference below 5°C). Furthermore, the tube thickness can be reduced, see below, which makes the temperature difference between the inner and outer side of the reformer tube smaller. It is hence possible to have

both a higher catalyst temperature and a lower tube temperature, all other conditions being the same when replacing the conventional reformer tubes with catalyzed hardware tubes. A low outer tube wall temperature is desirable since it prolongs the lifetime of the tube. A high catalyst temperature is advantageous since the reaction rate increases with temperature and since the equilibrium of reaction (3) is shifted to the right hand side resulting in a better utilisation of the feed.

Pressure drop in the catalyzed reformer tube is much lower than in the conventional case for the same tube diameter. This enables the use of reactors of non-traditional shapes e.g. tubes with small diameter and still maintaining an acceptable pressure drop. Smaller tube diameter results in an increased tube lifetime, tolerates higher temperatures and reduces the tube material consumption.

Finally, the catalyst amount is reduced when using catalyzed hardware reformer tubes compared to the conventional reformer with a fixed bed of reforming catalyst.

The small amount of catalyst dictates the use of a feedstock free of catalyst poisons. This can e.g. be obtained by sending the feedstock through a prereformer.

Fig. 1 shows an example of a plant producing syn-gas. Feed 2 is preheated, desulphurized in unit 4, mixed with process steam 6, and further heated before entering an adiabatic prereformer 8. The effluent stream from prereformer 8 is further heated in a heat exchanger coil arranged in flue gas channel 12 and send to the tubular reformer 14, where conversion of methane to hydrogen, carbon monoxide, and carbon dioxide occurs. The effluent gas is passed to autothermal reformer 16, wherein combustion is performed with oxidant stream 18. The processing of effluent gas 20 downstream from the autothermal reformer depends on the intended use of the product.

Catalyzed hardware can be used in two of the units shown in Fig. 1:

1. In the preheater coil 10 for heating the prereformer effluent gas before entering the tubular reformer 14.
2. In the tubular reformer 14.

This invention provides process for the preparation of hydrogen and carbon monoxide rich gas by steam reforming of a hydrocarbon feedstock in presence of a steam reforming catalyst supported as thin film on the wall of a reactor, comprising steps of

- (a) optionally passing a process gas of hydrocarbon feedstock through a first reactor with a thin film of steam reforming catalyst supported on walls of the reactor in heat conducting relationship with a hot gas stream;
- (b) passing effluent from the first reactor to a subsequent tubular reactor being provided with a thin film of steam reforming catalyst and/or steam reforming catalyst pellets and being heated by burning of fuel, thereby obtaining a partially steam reformed gas effluent and a hot gas stream of flue gas;
- (c) passing the effluent from the second reactor to an autothermal reformer; and
- (d) withdrawing from the autothermal reformer a hot gas stream of product gas rich in hydrogen and carbon monoxide.

### Example 1

A catalyzed hardware reformer reactor has been tested. The test unit consists of a system for providing the feeds to the reactor, the reactor itself, and equipment for posttreatment and analysis of the effluent gas from the reactor.

The reactor consists of a 1/4" tube of length 1080 mm which is, in the middle 500 mm, coated on the inner wall with EKMR nickel steam reforming catalyst. The catalyst has the same composition as the EKMR pelletshaped steam reforming catalyst available from Haldor Topsøe A.S. The thickness of the catalyst layer is 0.31 mm. The catalyzed reactor tube is placed in a casing made of solid metal, which has a hole closing tightly around the catalyzed tube. A number of milled grooves, in which thermocouples are placed, is made along the hole. One of the thermocouples is movable so that a wall temperature profile of the catalyzed tube can be obtained. Additionally, thermocouples are placed in the gas channel in the catalyzed tube measuring the gas temperature at the inlet to and the outlet from the catalyzed zone. The reactor with casing is placed in an electrically heated oven, in which the temperature can be controlled separately in 6 different zones.

The feed streams consist of hydrogen, methane, carbon dioxide, and steam. The feed streams are mixed and preheated before entering the reactor. After the reactor, the effluent gas stream is cooled down, the condensed water is separated from the gas, and the gas composition is measured by a gaschromatograph.

Two sets of conditions were tested. One set at lower temperature to simulate use of catalyzed hardware in a preheater coil (test No. 1), and one set at higher temperature to simulate a tubular reformer (test No. 2). The conditions are shown in Table 1. The pressure was in both cases 26 bar g. The temperature profile imposed on the

reactor wall measured by the movable thermocouple is shown in Fig. 2.

Table 1

Conditions for Catalyzed Hardware Reactor Test						
Test No.	Gas temperature at inlet of catalyzed zone	Gas temperature at outlet of catalyzed zone	Hydrogen flow rate	Methane flow rate	Carbon-dioxide flow rate	Steam flow rate
	°C	°C	NL/h	NL/h	NL/h	NL/h
1	605	633	62.0	310.0	16.1	781.4
2	679	795	240.5	152.0	63.1	425.0

The measured effluent gas composition is shown in Table 2. The gas composition is on dry basis.

Table 2

Effluent Gas Composition on Dry Basis				
Test No.	Hydrogen	Carbon-monoxide	Carbon-dioxide	Methane
	mole%	mole%	mole%	mole%
1	49.6	2.48	11.4	36.5
2	67.8	10.8	9.80	11.7

The effluent gas is in both cases in equilibrium with respect to the reforming reaction at the outlet gas temperature within experimental uncertainty. This demonstrates that a conversion similar to a fixed bed reactor can be obtained in a catalyzed hardware reactor.



## CLAIMS

1. Process for the preparation of hydrogen and carbon monoxide rich gas by steam reforming of a hydrocarbon feedstock in presence of a steam reforming catalyst supported as thin film on the wall of a reactor, comprising steps of

- (a) optionally passing a process gas of hydrocarbon feedstock through a first reactor with a thin film of steam reforming catalyst supported on walls of the reactor in heat conducting relationship with a hot gas stream;
- (b) passing effluent from the first reactor to a subsequent tubular reactor being provided with a thin film of steam reforming catalyst and/or steam reforming catalyst pellets and being heated by burning of fuel, thereby obtaining a partially steam reformed gas effluent and a hot gas stream of flue gas;
- (c) passing the effluent from the second reactor to an autothermal reformer; and
- (d) withdrawing from the autothermal reformer a hot gas stream of product gas rich in hydrogen and carbon monoxide.

2. Process of claim 1, wherein the steam reforming catalyst comprises nickel and/or noble metals.

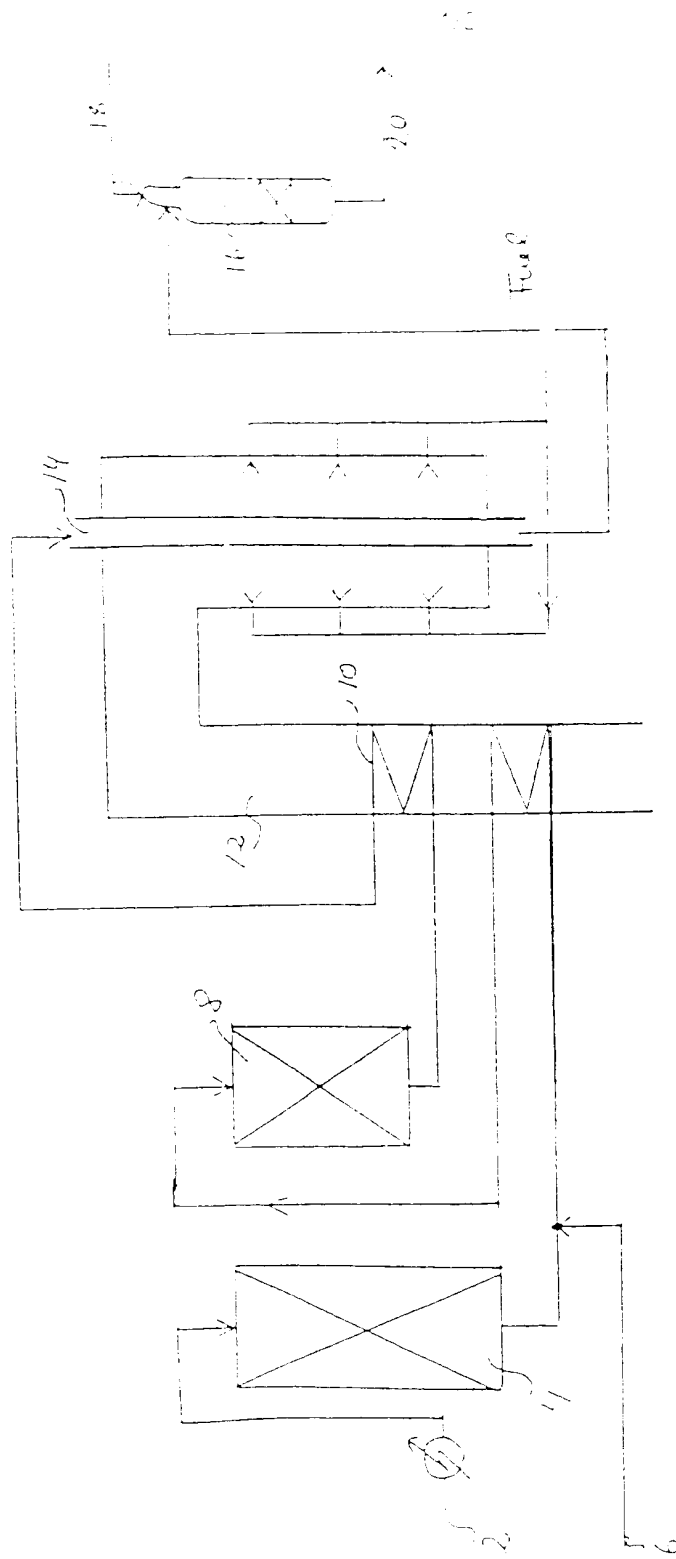


FIG. 1

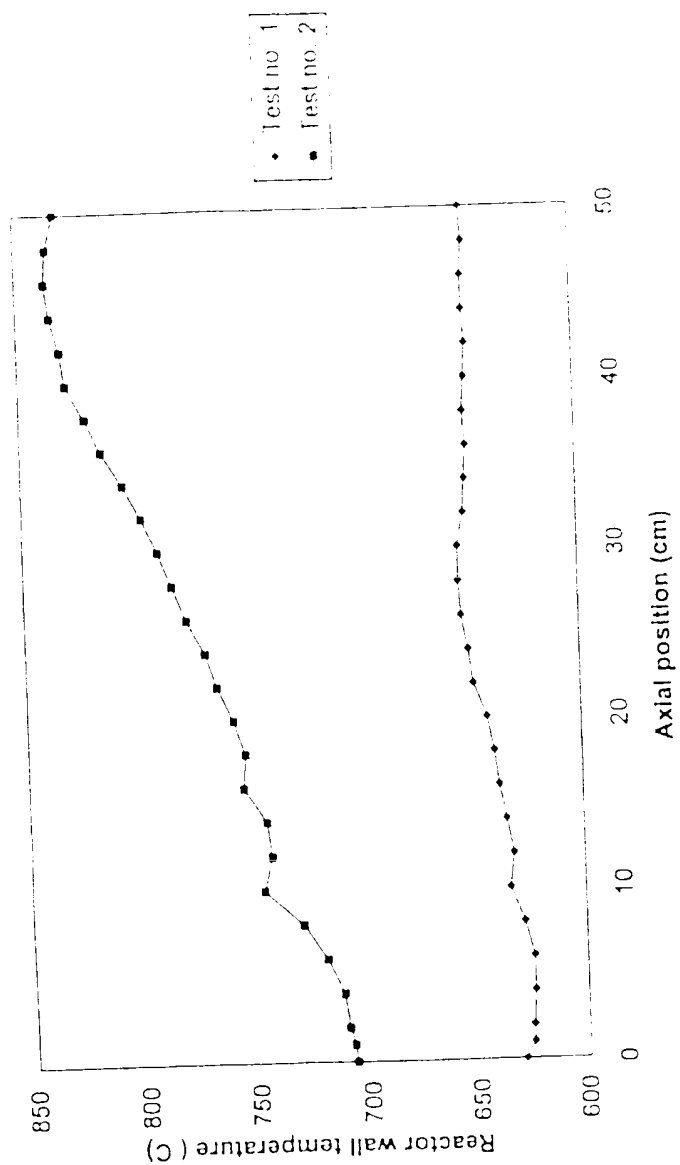


FIG. 2

# INTERNATIONAL SEARCH REPORT

Pat. No. Application No.

PCT/EP 95/04563

A. CLASSIFICATION OF SUBJECT MATTER  
IPC Class. H01B 1/00

B. FIELD OF SEARCH

IPC Class. H01B 1/00  
IPC Class. H01B 1/00

C. DOCUMENTS CONSIDERED TO BE RELEVANT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category of document with indication, where appropriate, of the relevant passages

Relevant to claim No.

A PATENT ABSTRACTS OF JAPAN  
Vol. 017, no. 551 (0-1117), 5 October 1993  
& JP 05 156602 A (SEKIYU SANGYO KASSEIKA  
CENTER:OTHERS: 01), 22 June 1993  
see abstract

1

A EP 0 583 211 A (TOPSCE HALDOR AS)  
16 February 1994  
see column 3, line 52 - column 4, line 20

1

A EP 0 305 203 A (TOPSCE HALDOR AS)  
1 March 1989  
see page 2, line 55 - page 5, line 21

1

A US 4 400 309 A (MCMAHON JOSEPH F. ET AL)  
23 August 1983  
see column 1, line 17 - line 53

1

---  
-/-

☒ Further documents are listed in the continuation of box C

☒ Patent family members are listed in annex

\* Special categories of cited documents

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) on which is cited to establish the publication date of another claim or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*I\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*T\* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*X\* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Y\* document member of the same patent family

Date of the actual completion of the international search

Date of making of the international search report

23 March 1999

30/03/1999

Name and mailing address of the ISA

European Patent Office, P.O. Box 1, Patentstr. 2  
CH-2050, CH-8001 Zurich  
Tel. +41 (0) 43 1 341 0041, Fax +41 (0) 43 1 341 0040  
Fax +41 (0) 43 1 341 0040

Authorized officer

Clement, J-P

# INTERNATIONAL SEARCH REPORT

International Application No.  
EP 0 440 286 A

C. Classification of documents considered to be relevant

Class No. 1. Classification of documents considered to be relevant to the relevant pages

Relevant document No.

A EP 0 440 286 A "TOPSIDE WALL OF AS"  
7 August 1991  
see page 6, line 30 - page 6, line 1  
-----

1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Application No. 01/045673

Publication No. and date of publication	Pub. No.	Pub. date	Pub. No.	Pub. date
EP 0386011	A	16-02-1994	DK 1003991 A	14-02-1994
			CA 2103999 A	14-02-1994
			DE 19310027 C	16-11-1995
			DE 19310027 T	21-03-1996
			DK 157693 A	14-02-1994
			JP 0716680 B	16-01-1995
			JP 0279002 A	04-11-1994
EP 0386013	A	01-03-1994	DK 445187 A	25-02-1989
			CA 1804215 A	30-06-1990
			DE 3885545 D	16-12-1993
			DE 3885545 T	10-03-1994
			JP 1139137 A	31-05-1989
			JP 0592662 B	19-03-1997
			US 4965230 A	15-01-1991
US 4409309	A	23-08-1983	CA 1177469 A	06-11-1984
			AU 5762073 A	09-01-1975
			CA 1008667 A	19-04-1977
			DE 3332686 A	17-01-1974
			DK 398781 A	09-09-1961
			FR 2190903 A	01-02-1974
			GB 1445122 A	04-08-1976
			GB 1445121 A	04-08-1976
			IN 144128 A	25-03-1978
			IN 140444 A	13-11-1976
			JP 1155209 C	15-07-1983
			JP 42043891 A	25-04-1974
			JP 57029401 B	22-06-1982
			NL 7303945 A	02-01-1974
			SE 406906 B	05-03-1979
			SE 411338 B	17-12-1979
			ZA 7304332 A	23-05-1974
EP 0440266	A	07-03-1991	DK 28390 A	03-06-1991
			AT 113260 T	15-11-1994
			AU 624759 B	16-06-1992
			AU 7017391 A	08-08-1991
			CA 2035331 A,C	03-08-1991
			CN 1056850 A,B	11-12-1991
			CS 9100248 A	13-08-1991
			DE 69104735 D	01-12-1994
			ES 2065556 T	16-02-1995
			JP 1954871 C	28-07-1995
			JP 4215837 A	06-03-1992
			JP 6075070 B	23-09-1994
			SK 279079 B	03-06-1996
			RU 2053957 C	10-02-1996
			US 5167933 A	01-12-1992